



Installation Instructions

Whispa Spa Noise Dampener

Installing the Whispa

1. Loop the therapy jet air and water lines to ensure proper function.
2. Create a manifold by plumbing the therapy jet air lines into one 2 inch line. Stub up directly behind the bond beam or in close proximity in an adjacent planter area. See figure 1.
3. Cut the stub to the Whispa internal housing to finish 2" above top of bond beam. See figure 1.
4. Glue the Whispa to the pipe. Lid & ring can be adjusted and set by deck personnel.
5. Remove muffler and rubber cap, and install 2" threaded plug to allow pressure testing of lines.
6. Finished installation should be per figure 2.
7. "Shell" rubber cap can be placed over muffler to shut of air and allow heating through therapy jets.

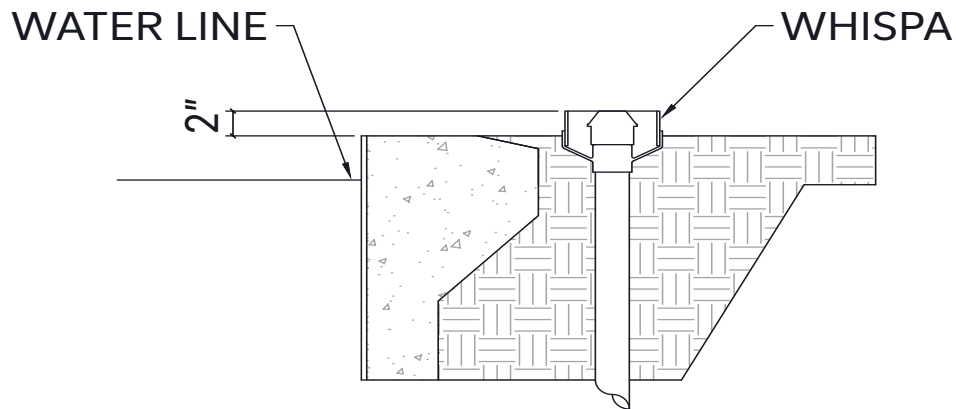


Figure 1

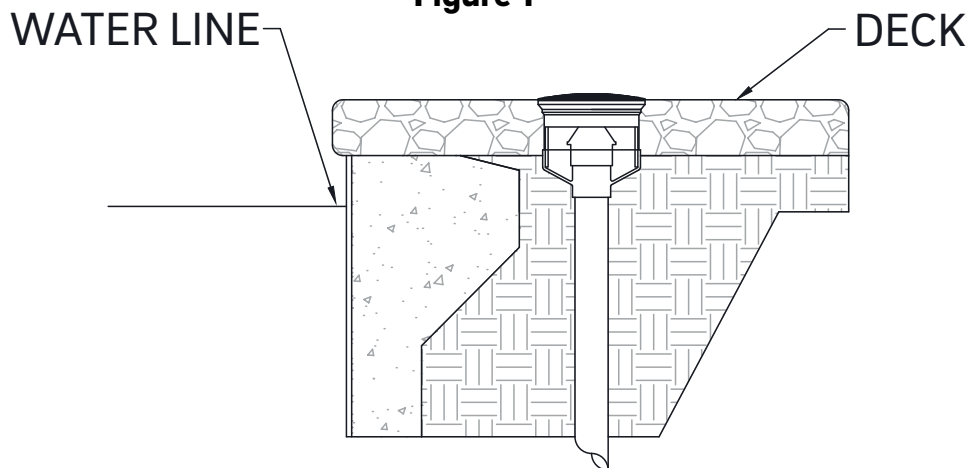


Figure 2